



Strata Single Dynamic Arm - W9231

Assembly Instructions

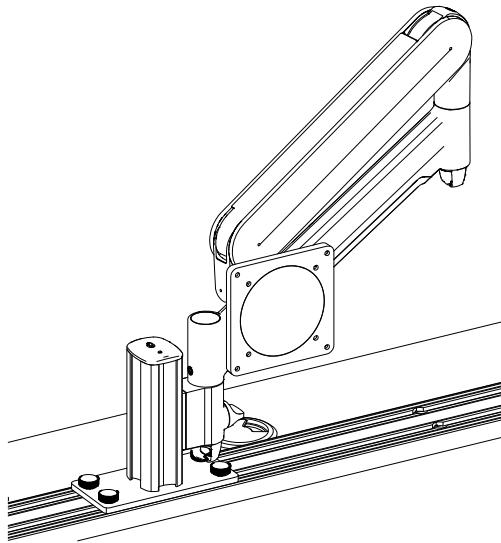

COMPONENT CHECKLIST

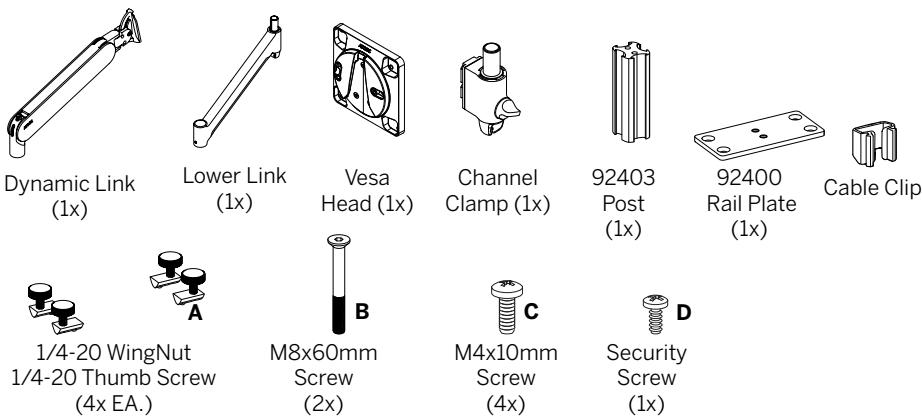

IMPORTANT INFORMATION

- Please ensure this product is installed as per these installation instructions.
- Do not remove/ throw away the black plastic sleeve on the channel clamp or arm links.
- The manufacturer accepts no responsibility for incorrect installation.
- This product is not suitable for outdoor use or mobile applications.
- Do not over-tighten screws and adjustment points on product.
- VESA mounted accessories (such as mini PC brackets and mounts), offset VESA locations, and unevenly weighted monitors (relative to the center of the VESA mounting interface) exert additional leverage that can exceed the capacity of the mount even though the monitor weight may be within the stated range. Please contact Atdec if you would like further information.

W9231 CONTAINS

- 1x 92403
- 1x 92430
- 1x 92400

REQUIRED TOOLS

- Phillips Head Screwdriver
- 4mm Hex Key


WEIGHT RANGE*

Flat display	2-8kg (17.6lbs)
Curved display	2-8kg (17.6lbs)


Strata Single Dynamic Arm - W9231

Assembly Instructions


STEP 1 - ATTACH POST TO RAIL PLATE

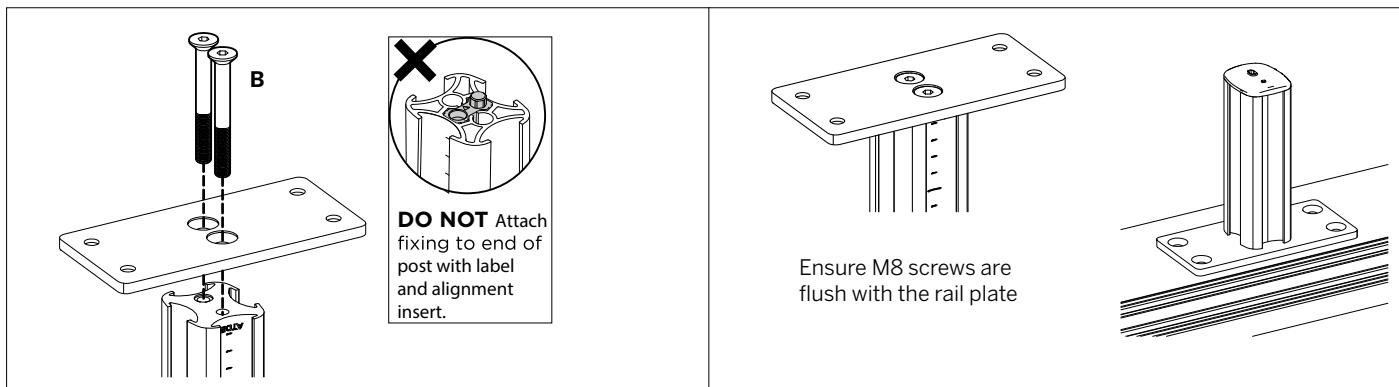

STEP 2 - ATTACH POST TO VERSA TRACK

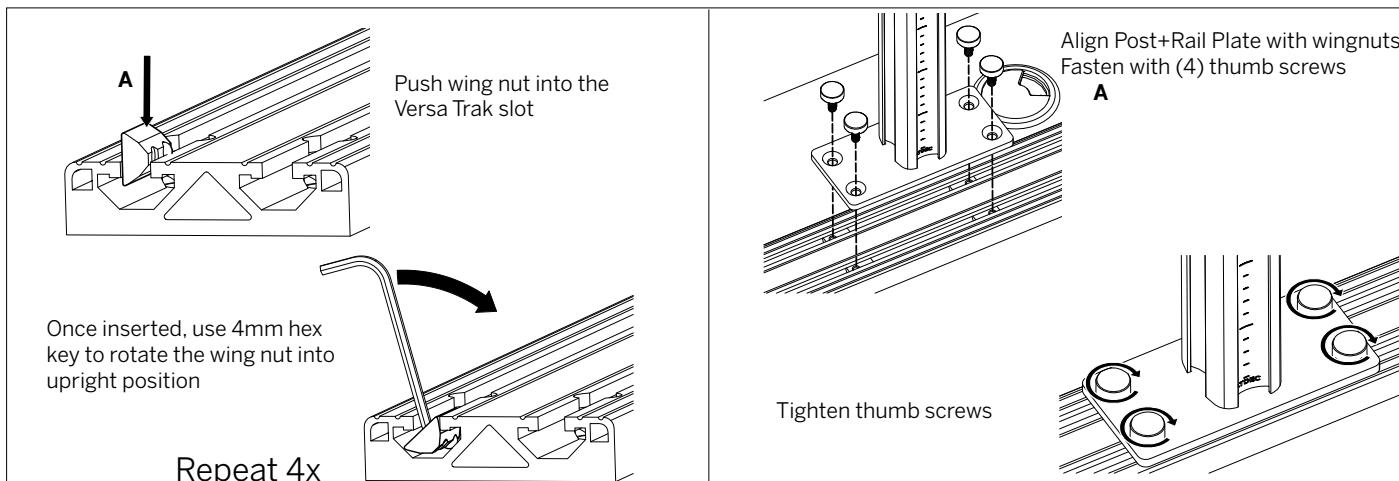


STEP 3 - FIX CHANNEL CLAMP TO POST

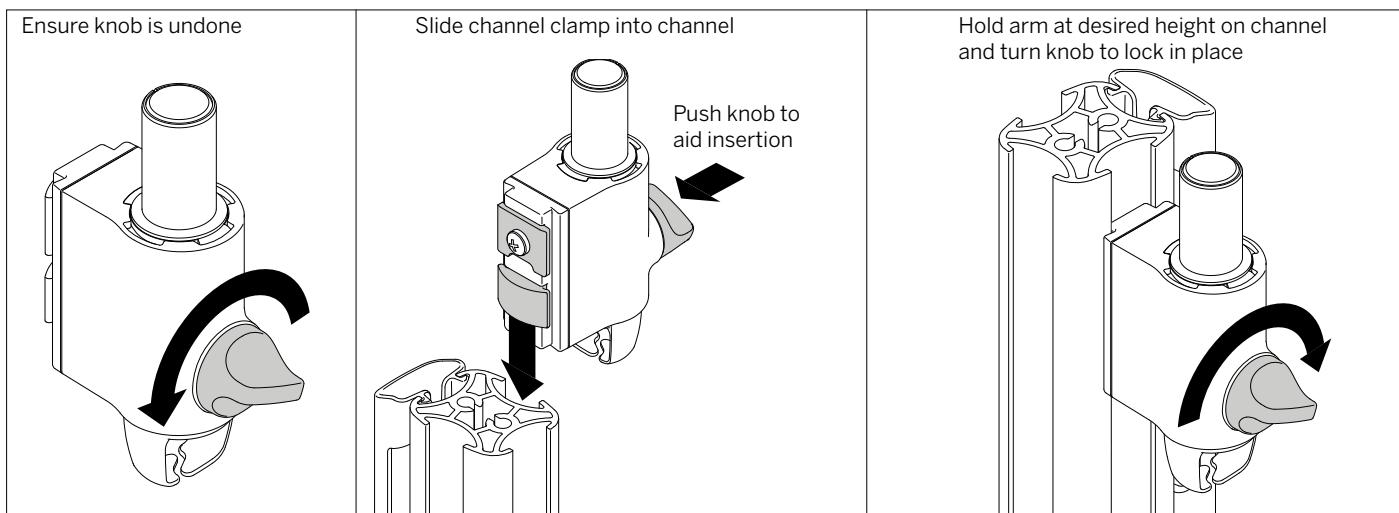


Strata Single Dynamic Arm - W9231

Assembly Instructions


STEP 4 (OPTIONAL) - SET ARM ROTATION TO 180°

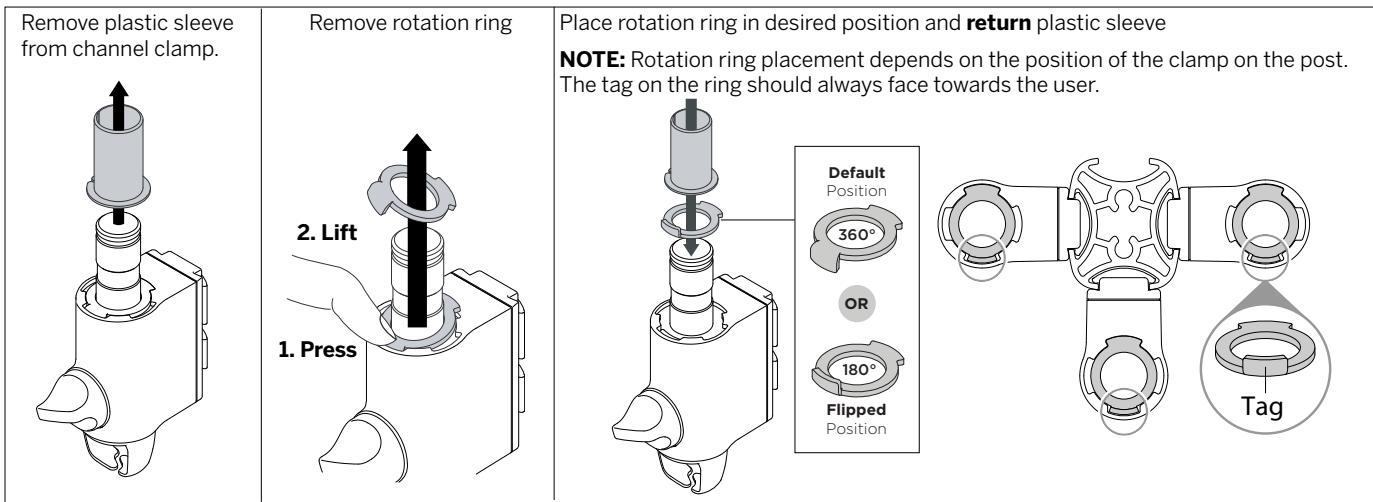

STEP 5 - ASSEMBLE ARM LINKS

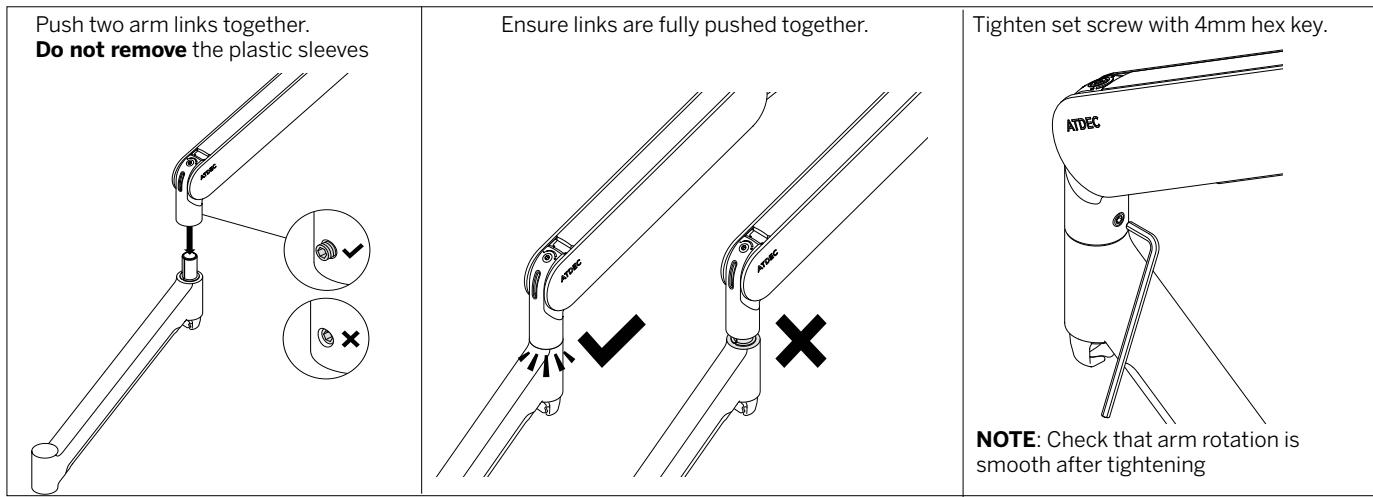

STEP 6 - FIT ARM ONTO CHANNEL CLAMP

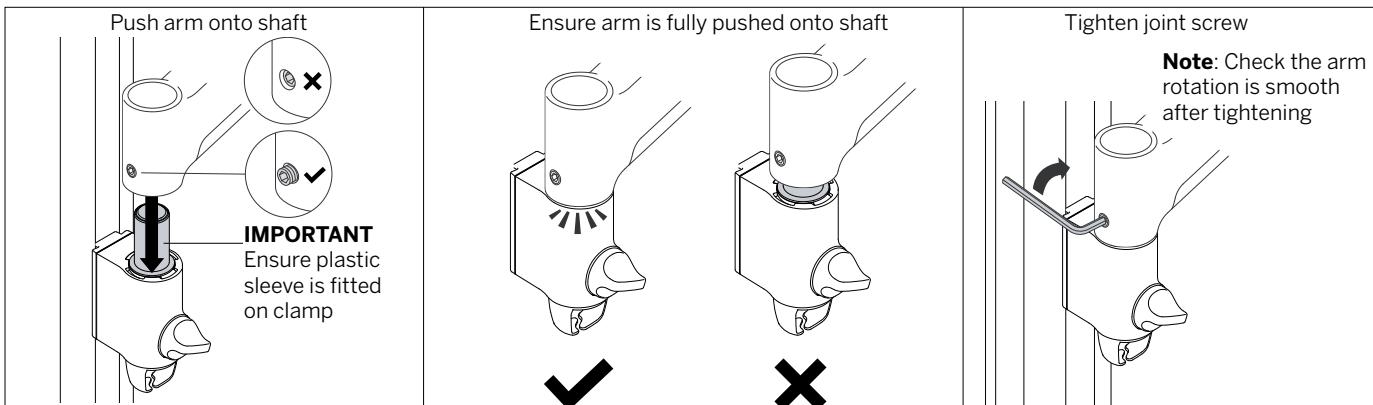


Strata Single Dynamic Arm - W9231

Assembly Instructions


STEP 7 - ATTACH VESA HEAD TO MONITOR

Check VESA mounting compatibility of monitor


Note: For other sizes, use a suitable adaptor plate (sold separately)

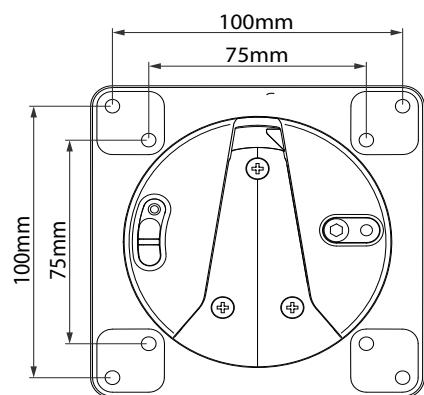


Note: Recessed 75x75 VESA interfaces will require a Spacer Kit (sold separately)

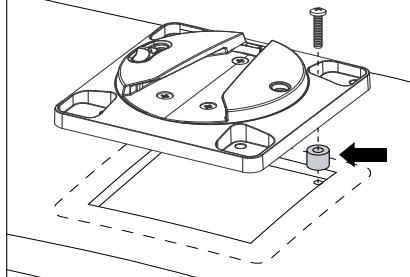



Attach VESA head onto monitor with provided screws.
(Alternatively, use fasteners specified by the monitor manufacturer)

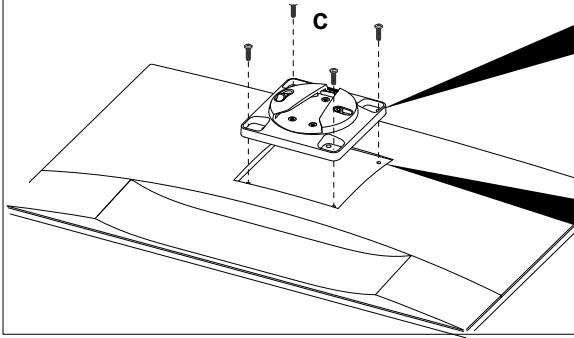

TIP
To allow monitor to be rotated upside down, mount VESA head in the alternate orientation shown.

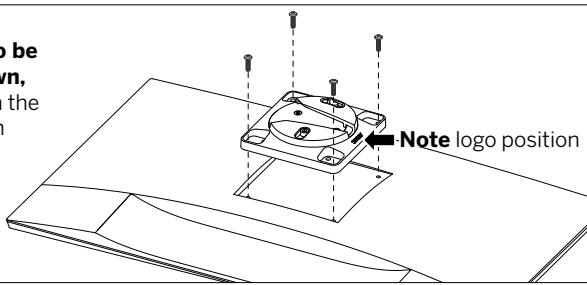


Note: Ensure screw length suits the monitor VESA mounting holes



STEP 8 - ATTACH MONITOR TO ARM


Fit monitor onto arm.

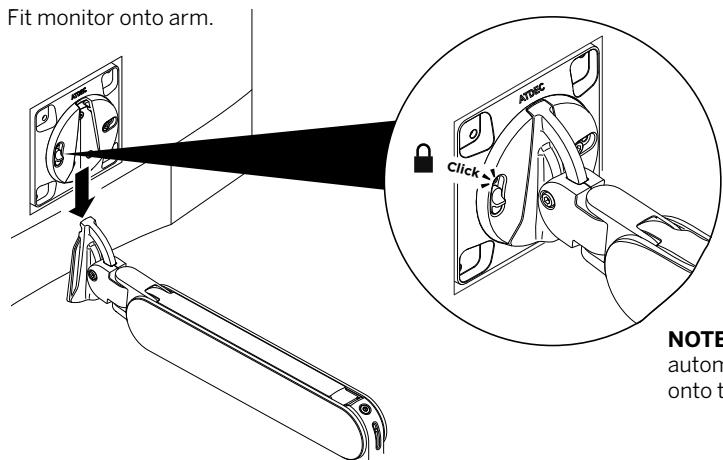

NOTE: VESA head will automatically latch onto the tilt link

OPTIONAL SECURITY SCREW


If desired, once monitor is attached to the arm, install the security screw which disables the release switch.

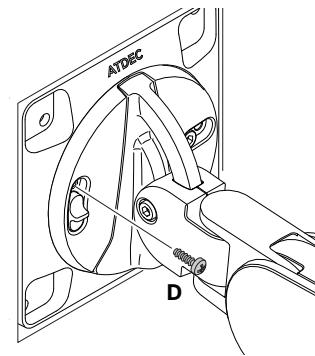


Strata Single Dynamic Arm - W9231

Assembly Instructions

STEP 9 - FINE TUNE ADJUSTMENT

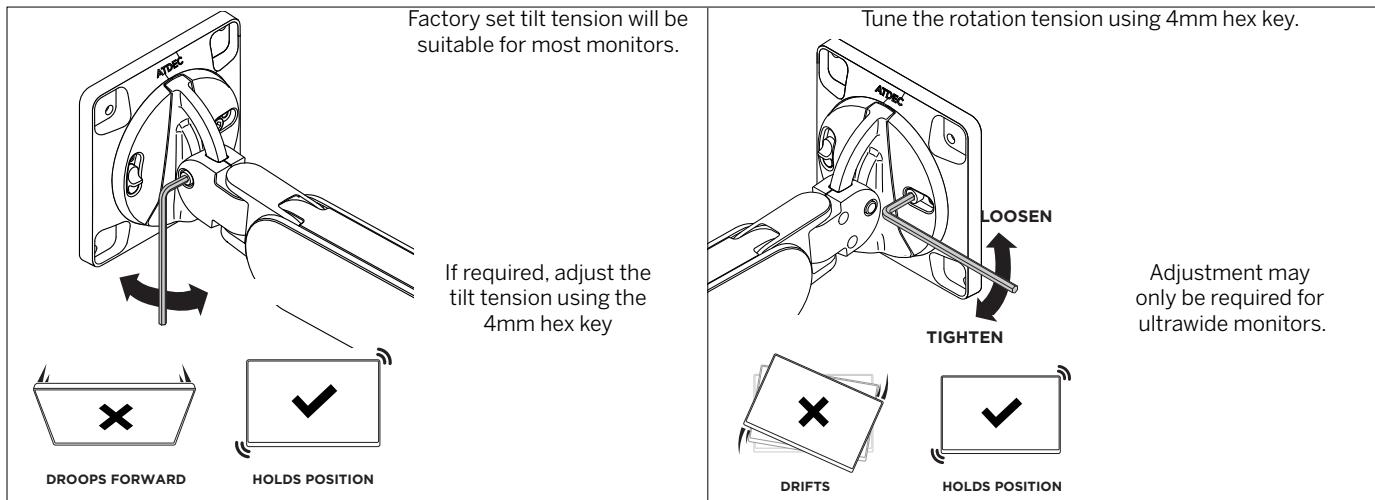

STEP 10 - ADJUST COUNTERBALANCE TENSION

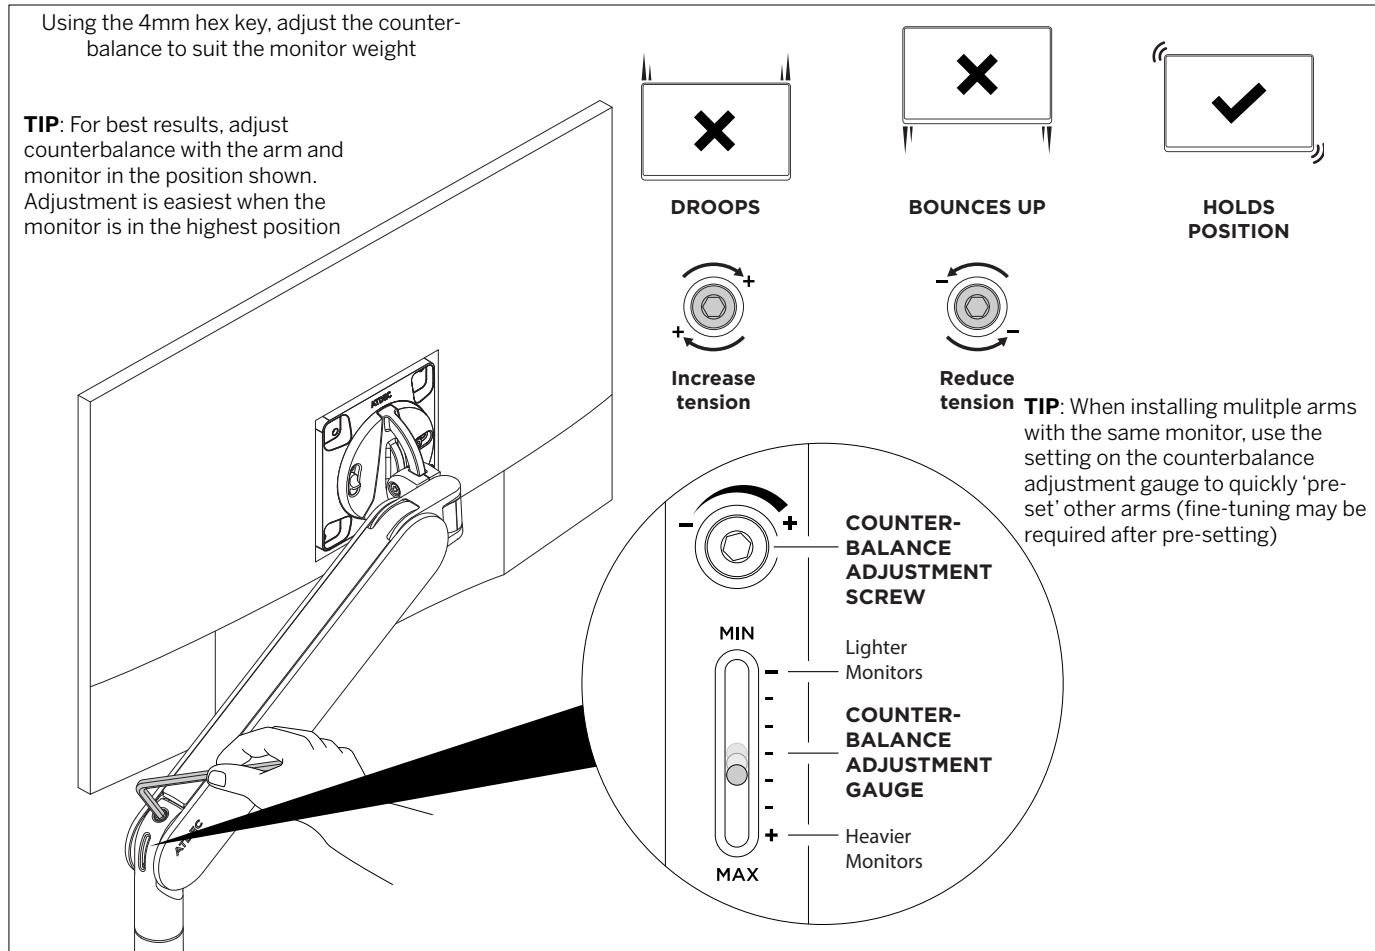


Strata Single Dynamic Arm - W9231

Assembly Instructions

STEP 11 - MONITOR CABLE MANAGEMENT

Plug cables into the monitor and route the cables down the arm using the cable clips

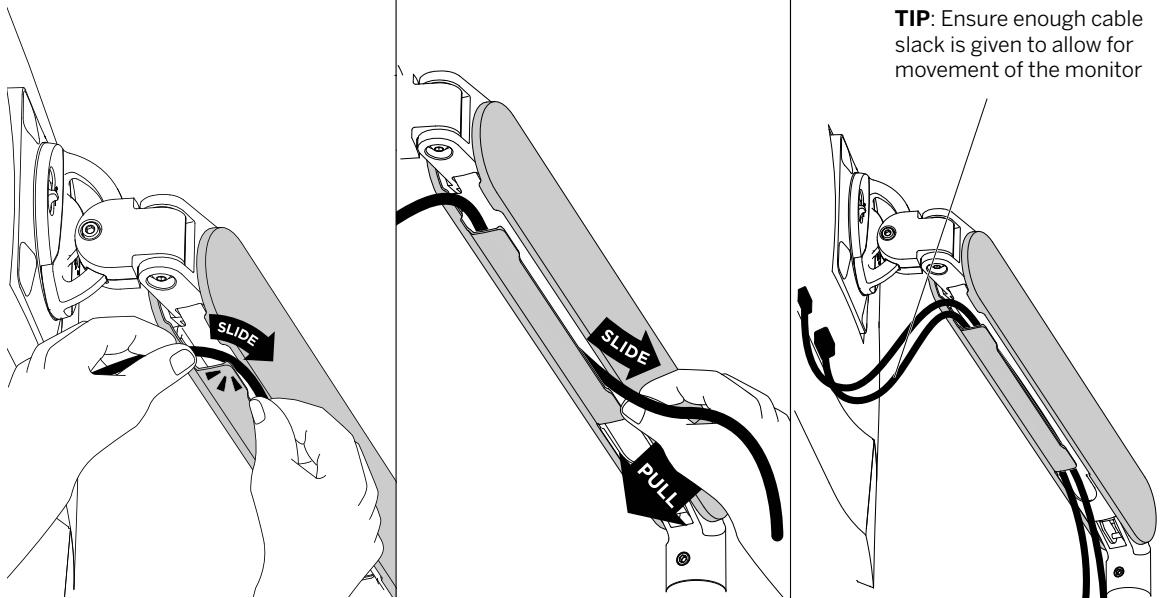

Plug cables into lower arm hook flaps

Slide the remaining loose cable from the central gap up the arm.

